Projector Specs

E-Vision Laser 8500 Lumen,
Solid State Phosphor 1-chip
DLP projector

Used as Front Projection

Sound System Notes

Subwoofers are Renkus Heinz UF18 S-5 and are located above the lighting grid out of sight.

For Surround Sound Applications, the following is in use:
Left, Right, and Center IC2
CF18s-5 Subwoofers
Eight CFX-81
Fed by Extron SSP 7.1 processor

For Music Events/Presented Events, the following is in use:
Left, Right, and Center IC2
CF18s-5 Subwoofers

Lighting System Notes

Truss positions are not drawn in position.
House lights are overhung on truss positions.
House lights on Truss 1 are drawn offset for clarity.

Auxiliary Channels

(95) Lobby Lights
(96) Lobby Lights
(97) Lobby Lights
(98) Lobby Lights
(99) Lobby Lights
(100) Work Lights

Instrumentation Key

- ColorSource Par MFL
- ColorSource Par WFL
- ColorSource Par XWFL
- SourceFour Jr. Zoom
- SourceFour Zoom
- ColorSource Spot 19 deg
- ColorSource Spot 26 deg
- ColorSource Spot 36 deg
- Chauvet SlimPar 56 LED
- Speaker — Renkus-Heniz IC2R
- Speaker — Renkus-Heinz CFX-81

Legend

Unit Number → 1 (1) ← Channel

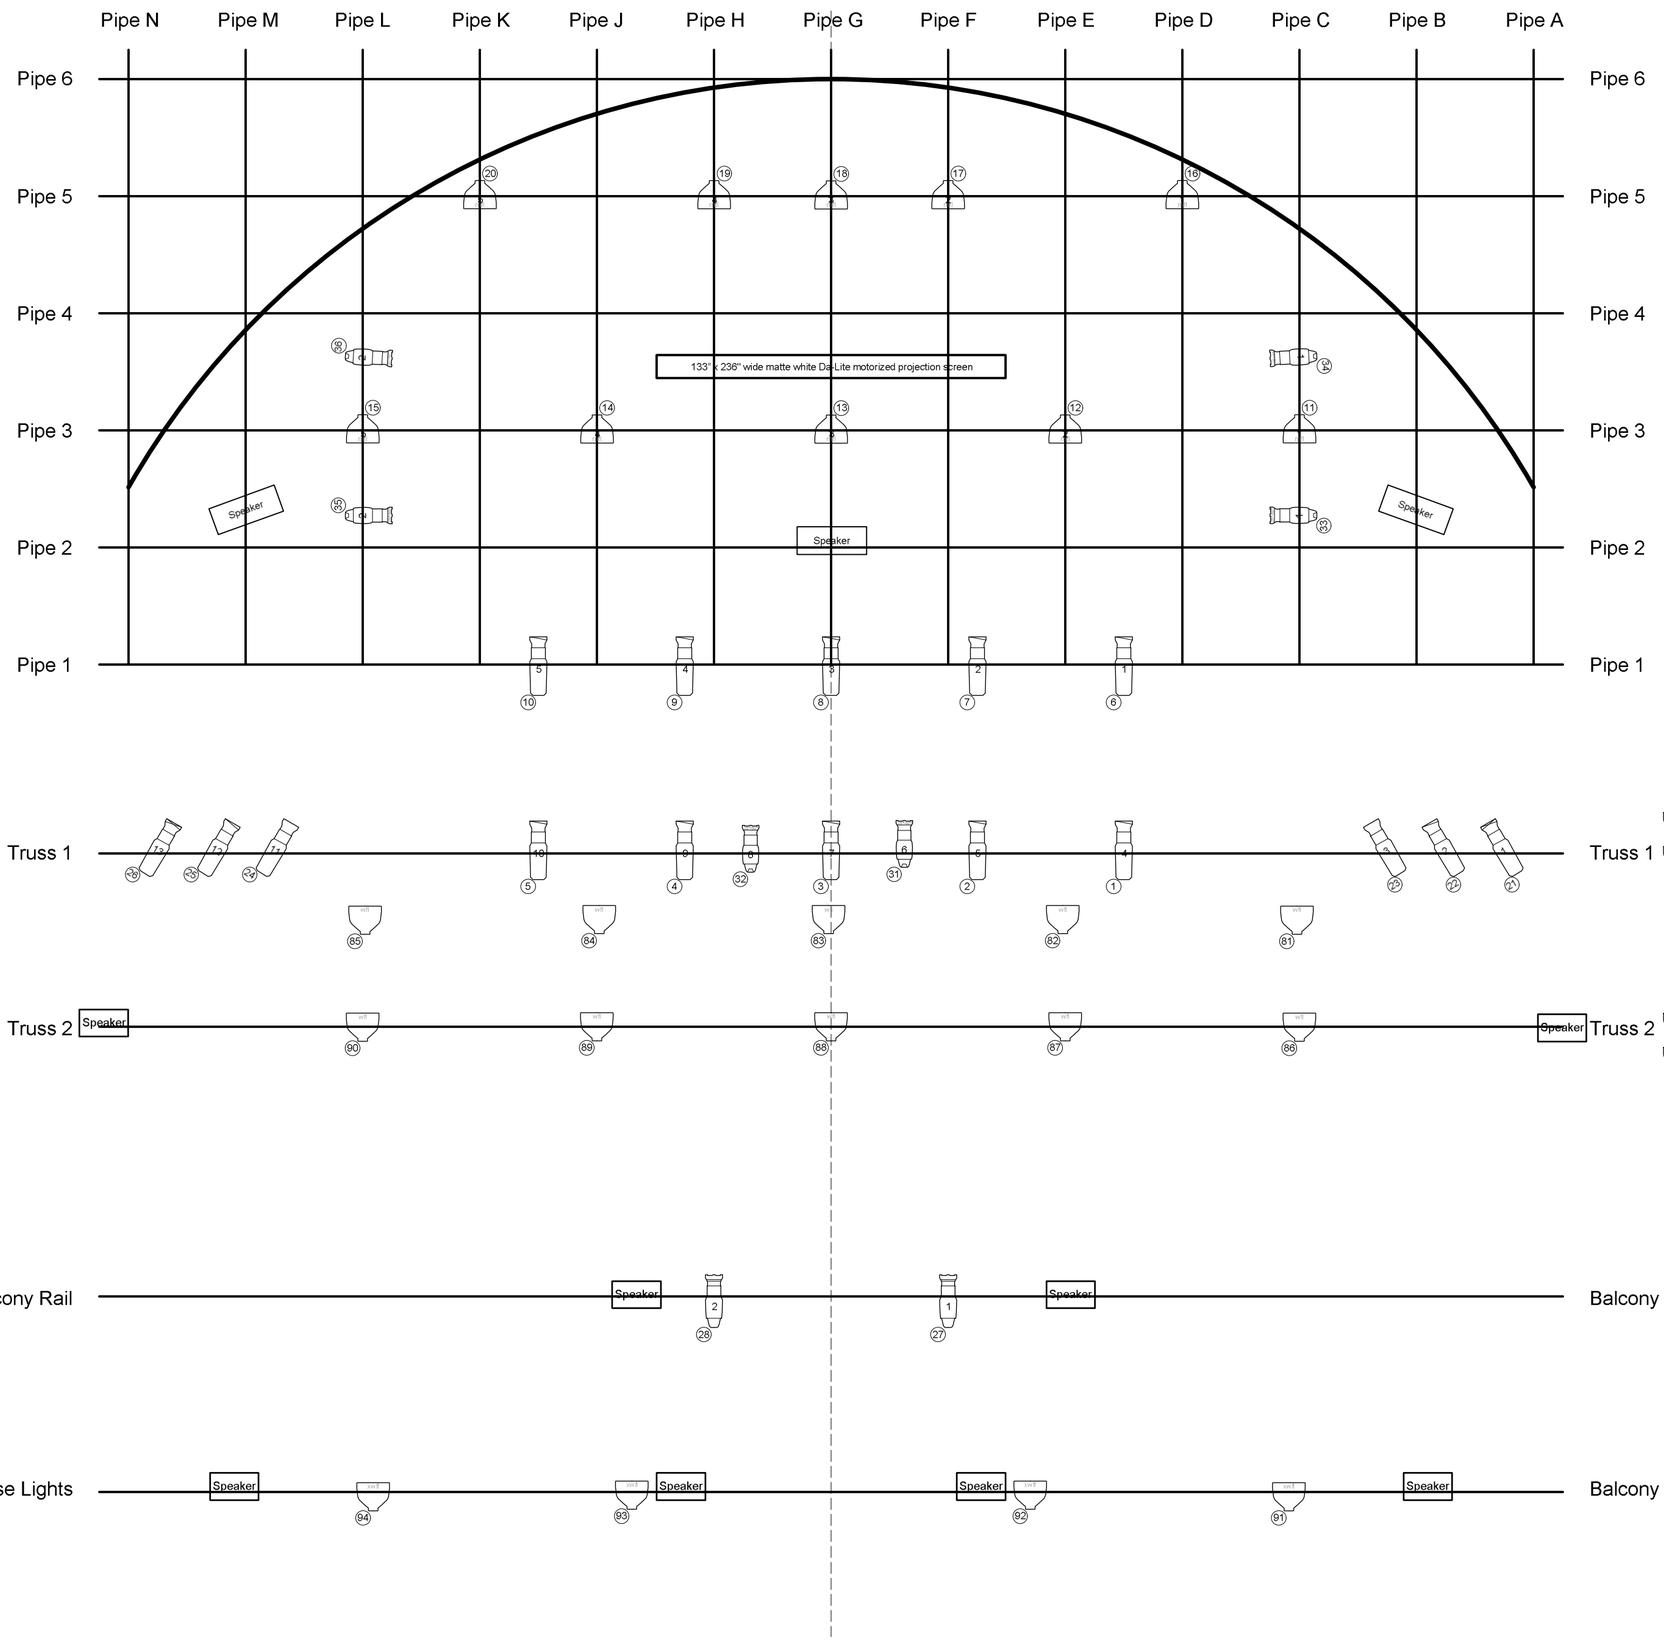

Hopewell Theatre Rep Plot
Drafted by: Amber Faulhaber
Last updated May 15, 2017
Page 1

DOCUMENT PRINTS ANSI D SIZE 22" x 34"